


AB-9000™

Automatic Bagging/Sealing Machine

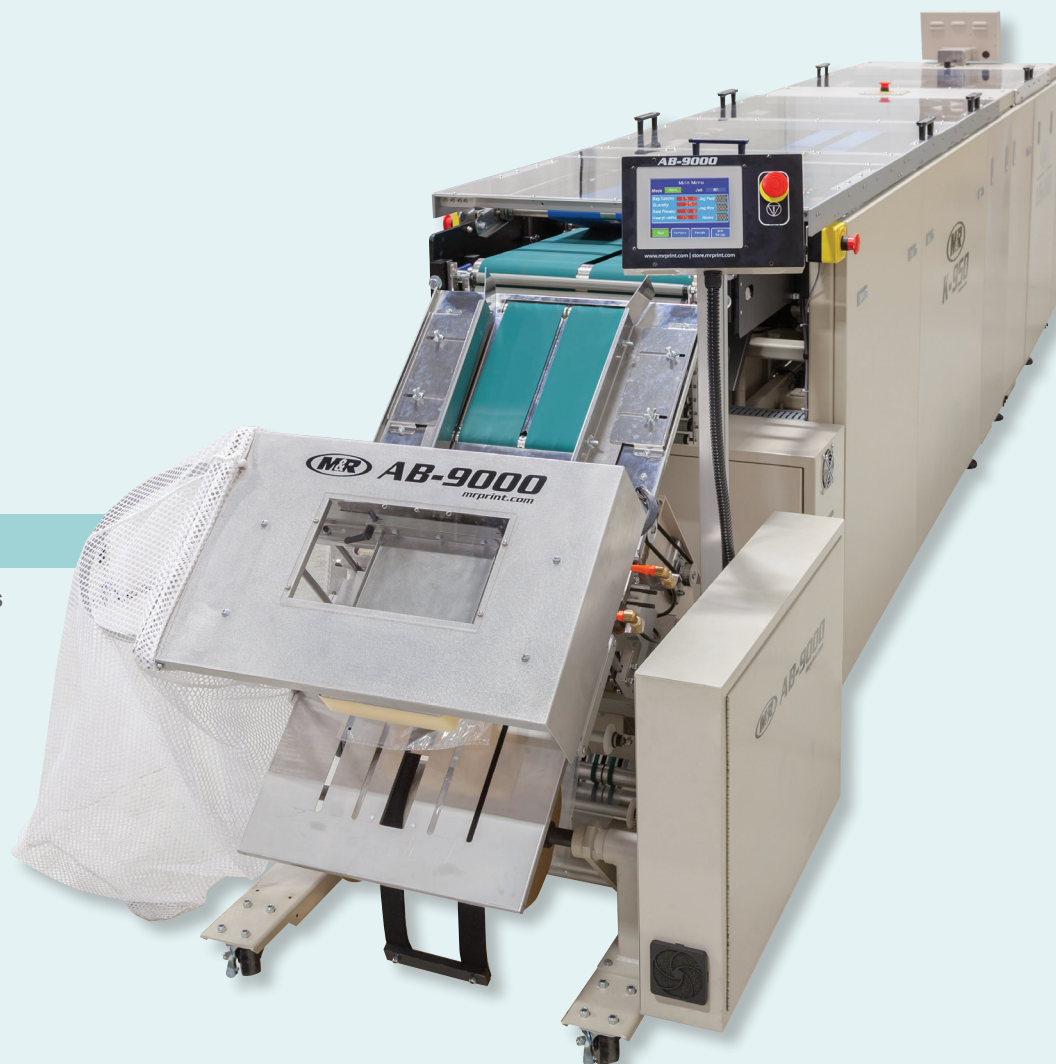

FEATURES

- Automates the bagging process
- Reduces labor costs
- Increases bagging speed

M&R's AB-9000 high-speed Automatic Bagger quickly pays for itself by streamlining the bagging process, eliminating costly, inefficient manual bagging and sealing. In fact, when coupled with M&R's K-950 folder, a single operator can fold and bag up to one-thousand garments per hour. That's far faster than two operators could fold and bag using traditional methods. The AB-9000 can bag and seal up to 18 roll-fed bags per minute, and it's capable of processing bag sizes ranging from 10 x 13 cm (4" x 5") to 30 x 38 cm (12" x 15"). The AB-9000's touchscreen control center tracks productivity, including bags-per-minute/hour and production rates for each job. M&R's Job Recall™ feature stores job data that can be recalled for similar and repeat runs. The control center also includes machine diagnostics and can be electronically linked to many M&R automatic folding machines to create a fully automatic folding/bagging/sealing system. For example, the AB-9000 has an interlink that connects to M&R's K-950 folder. When the AB-9000 pauses at the end of a job, it sends a signal to the K-950 to stop folding. As soon as the AB-9000 is programmed to start a new job, it signals the K-950 to start folding again.

Designed for ease of operation and maintenance, the AB-9000 offers automatic bag threading for fast, easy setup and changeover. The servo-motor bag-drive system maximizes productivity with high-speed bag feeding and precise bag placement. The infeed chute uses a simple slide-and-lock mechanism to tailor the width of the chute to the width of the product. The multi-belt/pinch roller bag-web drive system holds the web securely and maintains a constant position for precise product loading and accurate sealing. The removable synchronized bag deflator eliminates excess air to give the final product a clean, attractive appearance. Although the sealing mechanism is completely enclosed during operation, a clear acrylic window allows easy viewing of the sealing process for quick adjustments. Compact, affordable, and able to handle bags of varying dimensions, AB-9000 improves bagging efficiency by reducing labor costs and increasing throughput.

www.mrprint.com
store.mrprint.com

AB-9000™

STANDARD FEATURES

BAGGER/SEALER

- Enables a single operator to fold and bag up to one-thousand garments an hour when coupled with M&R's K-950 folder
- High-speed/high-temperature sealing
- Slide-and-lock infeed chute
- Trim seal trims the excess bag material for optimum product appearance

CERTIFICATION

- CE Certified: Built to specifications established by the European Committee for Standardization® (CE)

CONTROL CENTER

- Color touchscreen control panel with onboard self-diagnostics controls all machine functions
- Digital temperature controller
- Electronic cycle counter for production rate tracking
- Interlink feature signals M&R's K-950 folder to stop folding whenever the AB-9000 pauses

- Job Recall™ allows operators to store operational parameters for similar and repeat runs
- PLC (programmable logic control)

DESIGN & CONSTRUCTION

- Automatic bag threading
- Can be electronically linked to many M&R automatic folding machines
- Compact, ergonomic design
- Heavy-duty casters for easy mobility
- Servo-motor bag-drive system
- Synchronized bag deflator


WARRANTY, SERVICE & SUPPORT

- 24-hour hotline is staffed 365 days a year
- Access to M&R's Training Center
- M&R OEM parts—including genuine M&R pallets & platens—and screen printing supplies are available online at store.mrprint.com
- One-year limited warranty

SPECIFICATIONS

	AB-9000
Air @ 6.9 bar (100 psi)	113 l/min (4 cfm)
Bag Material Thickness	1.0-5.0 mil
Electrical Requirements ¹	110 V, 1 ph, 12.3 A, 60 Hz, 1.3 kW 208/230 V, 1 ph, 6 A, 50/60 Hz, 1.4 kW
Maximum Bag Size	30 x 38 cm (12" x 15")
Maximum Product Height	10.2 cm (4")
Maximum Seal Width	41 cm (16")
Overall Size (L x W x H)	97 x 94 x 132 cm (38" x 37" x 52")
Shipping Weight	181 kg (400 lb)

¹ If incoming voltage differs from the voltage(s) listed in this brochure, calculate amperage accordingly. Other electrical configurations are available. Contact The M&R Companies for details.

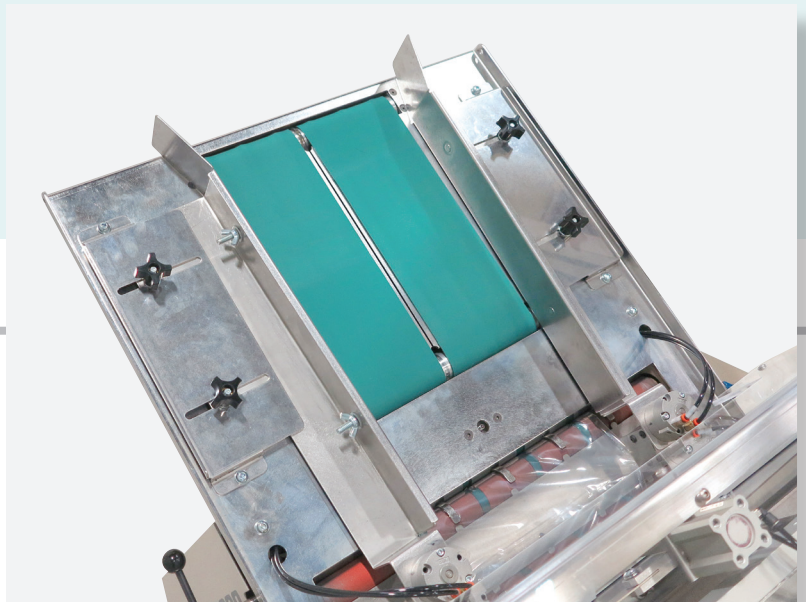

Infeed chute with belt-driven system delivers shirts quickly and accurately to the bag



The M&R Companies

M&R Sales and Service, Inc. 440 Medinah Road, Roselle, Illinois 60172-2329 USA
USA: 800-736-6431 / 630-858-6101 • Outside USA: +1-847-967-4461 • FAX: 630-858-6134

M&R Printing Equipment, Inc. and its subsidiaries (hereinafter M&R), believe the information in this advertisement to be accurate at publication, though it does not purport to list all manufacturing and specification variations, nor does it assume liability resulting from incompleteness or inaccuracy. M&R reserves the right to change specifications without notice. M&R expressly disclaims any liability for damages, consequential or incidental, from purchase, installation, servicing, and/or use of any product/service based upon information herein. No warranties of merchantability or fitness for a particular purpose are made or are to be implied from the information herein. No information herein may be reproduced or used in any manner without the prior, express written consent of M&R in each case. Copyright 2018 M&R Printing Equipment, Inc. All rights reserved. 20180702